


HIGH SPEED ABA 3-LAYER BLOWN FILM MACHINE IN LINE 2 COLOR PRINTER



ABA Extruder LE-55 / 55 (I



Flowchart

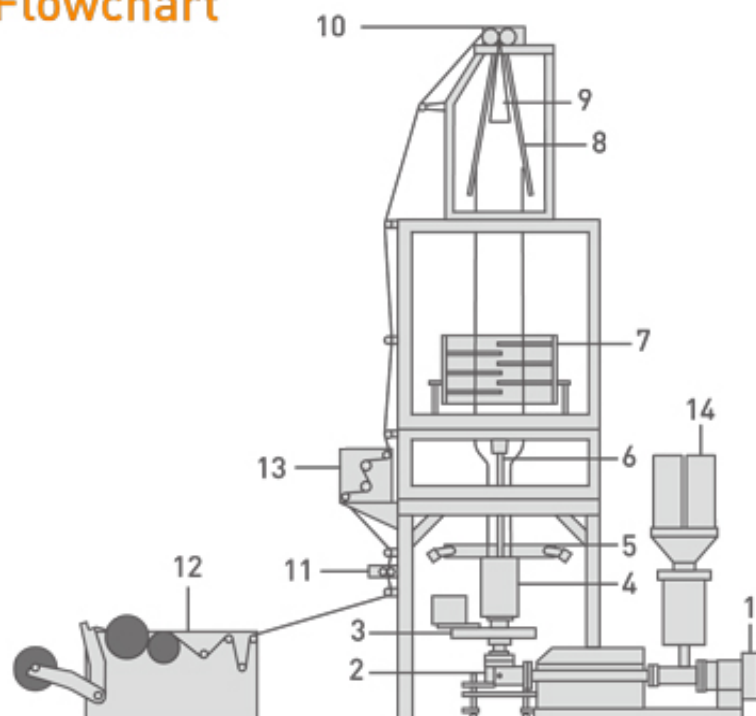

NO	Description
1	Extruder
2	Cylindrical
3	Rotary Device
4	Die Head
5	Air Ring
6	Stabilizing
7	External Bubble Stabilizer
8	Collapser
9	Gusseting Unit
10	Take-up Unit
11	2nd Take-up Roller
12	KF Winder
13	Surface Treatment
14	Gravimetric Control System

Features

- LE series is supplied with high performance AC main motor & inverter, which is designed for energy saving as well as minimum maintenance.
 - Minimum power consumption and labor cost.
 - Improved Die & Air Ring design, ensures higher film quality and easier production control.
 - Equipped with PID temperature controller and user friendly HMI control system.
- Option: Rotary Device, Bi-metallic Screw, Columnar Screen Changer, Gravimetric Blending System, Auto Feeding Loader, Surface Treater, Gusset Device, Double Rewinder, Chiller and Chilling Box.

Specifications

* Specification subject to change without notice

MODEL	LE - 55 / 55 (KF-1250)
Suitable Materials	HDPE / LDPE / LLDPE / Caco3 / Recycled Material
Effective Film Width (Max.) (mm)	1200
Thickness of Film (mm)	0.008~0.07 (HDPE) / 0.02~0.2 (LDPE)
Max. Production Output (kg/hr)	150
Machine Height (M)	7

www.lungmeng.com.tw



uCloud



LUNG MENG MACHINERY CO., LTD.

Headquarters

No. 20, Huan Kung Rd.,
Yung Kang Ind. Area,
Tainan City 710, Taiwan
T.+886-6-232-1126
F.+886-6-203-1178
E.sales@lm-hq.com

Taipei Office

6F-7, No. 28, Sec. 3,
Ren-ai Rd., Da-an Dist.,
Taipei City 106, Taiwan
T.+886-2-2706-0758
F.+886-2-2706-0658